

DemoPad Centro-CM



IP Control Gateway

Specification Sheet

The Centro-CM IP Gateway is a small footprint wall mountable device ideal for commercial and residential control applications. This low cost, high performance device can control a wide range of equipment ideal for meeting rooms, hotel bedrooms and smart homes. It can be used standalone or with a Centro-8M processor to add true automation functionality.




Key Features

- Integrated IR Learner
- Multiple TCP Connectivity
- Configurable I/O
- Free Control App
- Free PRO Graphics
- Seamless integration with DemoPad Designer

Package Contents

- Centro-CM IP Control Gateway
- 1x IR Learner/Extender Cable
- 4x IR Blaster Cable
- 7x Terminal Block Connectors
- 1x 5V DC Power Supply
- 1x Operation Manual

For instructions on how to get started, visit dempad.com/products/centro-cm

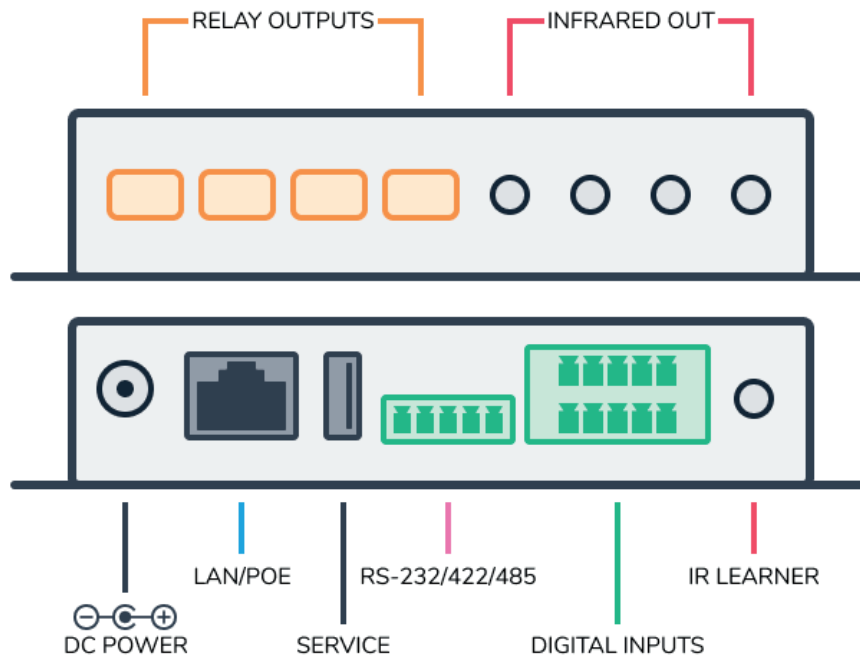



Connectivity

Inputs	1x RJ45 for 1x IP Control
	1x 3.5mm Stereo Mini-jack 1 x Infrared Receiver for learning
	8x 1-Pin Terminal Block 8x Trigger Inputs
	1x USB Type A
Outputs	4x Relay rated at 30v AC
	4x 3.5mm Stereo Mini-jack with IR Emitters
	1x 5-Pin Terminal Block to configure as either RS-232/422/485/DMX512

Power

Power Supply	5V DC, 2.6A
Power Consumption	3.63W

Dimensions & Weight

W x D x H	128mm [W] x 118mm [D] x 25mm [H]
Weight (net)	400g

Environmental

Operating Temperature	0°C – 40°C / 32°F – 104°F
Storage Temperature	-20°C – 60°C / -4°F – 140°F
Relative Humidity	20 - 90% RH (Non-condensing)

Regulatory

Safety & Emission	CE, FCC
-------------------	---------